


# MULTI-CONDUCTOR STRANDED UNSHIELDED

CSA/FT4/UL

- Conductor** Stranded tinned copper
- Insulation** 600V Colour coded semi-rigid PVC
- Jacket** Grey PVC
- Temperature** -20°C to 105°C
- Approvals** CSA Certified CMG/UL listed to CM harmonized standard C22.2 No. 214 and UL 444  
 Certified to CSA C22.2 No. 210.2 - Type AWM  
 Passes CSA/FT4 vertical flame test  
 Passes UL 70,000 BTU vertical flame test  
 75°C UL listed CMR (Riser) also available




**Applications** For use in PA systems, unbalanced intercom systems, interconnecting cables, remote control circuits, low voltage, broadcast and studio use, temperature control systems.

Product Code	AWG Size	# of Cond.	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
35A2202U	22	2	7/30	0.008	0.015	0.130	9	black/red
35A2203U	22	3	7/30	0.008	0.015	0.138	12	black/red/green
35A2204U	22	4	7/30	0.008	0.015	0.150	15	1
35A2206U	22	6	7/30	0.008	0.023	0.194	25	1
35A2208U	22	8	7/30	0.008	0.023	0.209	31	1
35A2210U	22	10	7/30	0.008	0.023	0.238	38	1
35A2002U	20	2	7/28	0.009	0.015	0.150	13	black/red
35A2003U	20	3	7/28	0.009	0.015	0.159	18	1
35A2004U	20	4	7/28	0.009	0.023	0.190	25	1
35A2005U	20	5	7/28	0.009	0.023	0.206	30	1
35A2007U	20	7	7/28	0.009	0.023	0.224	40	1
35A2009U	20	9	7/28	0.009	0.023	0.259	50	1
35A2012	20	12	7/28	0.009	0.023	0.281	60	1
35A2019	20	19	7/28	0.009	0.030	0.352	103	2

Continued On Page 5

## MULTI-CONDUCTOR STRANDED UNSHIELDED CSA/FT4/UL

- Conductor** Stranded tinned copper
- Insulation** 600V Colour coded semi-rigid PVC
- Jacket** Grey PVC
- Temperature** -20°C to 105°C
- Approvals** CSA Certified CMG/UL listed to CM harmonized standard C22.2 No. 214 and UL 444  
 Certified to CSA C22.2 No. 210.2 - Type AWM  
 Passes CSA/FT4 vertical flame test  
 Passes UL 70,000 BTU vertical flame test  
 75°C UL listed CMR (Riser) also available

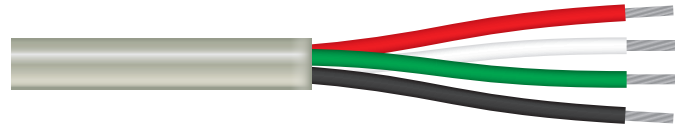

**Applications** For use in PA systems, unbalanced intercom systems, interconnecting cables, remote control circuits, low voltage, broadcast and studio use, temperature control systems.

Product Code	AWG Size	# of Cond.	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
35A1802U	18	2	16/30	0.012	0.023	0.197	21	black/white
35A1803U	18	3	16/30	0.012	0.023	0.209	28	1
35A1804U	18	4	16/30	0.012	0.023	0.227	35	1
35A1805	18	5	16/30	0.012	0.023	0.248	43	1
35A1807	18	7	16/30	0.012	0.023	0.270	57	1
35A1809	18	9	16/30	0.012	0.030	0.328	76	1
35A1812	18	12	16/30	0.012	0.030	0.368	99	2
35A1815	18	15	16/30	0.012	0.030	0.397	120	2
35A1819	18	19	16/30	0.012	0.030	0.429	148	2
35A1825	18	25	16/30	0.012	0.032	0.506	194	2
35A1602U	16	2	26/30	0.015	0.023	0.235	31	black/white
35A1603U	16	3	26/30	0.015	0.023	0.250	42	1
35A1604	16	4	26/30	0.015	0.023	0.273	53	1
35A1605	16	5	26/30	0.015	0.023	0.300	65	2
35A1607	16	7	26/30	0.015	0.030	0.341	92	2
35A1612	16	12	26/30	0.015	0.030	0.448	151	2
35A1402	14	2	41/30	0.020	0.023	0.283	45	black/white
35A1404	14	4	41/30	0.020	0.030	0.345	85	1
35A1407	14	7	41/30	0.020	0.030	0.413	139	2
35A1202	12	2	65/30	0.030	0.030	0.378	76	1 or 7