


## MULTI-PAIR FOIL SHIELD LOW CAP - PLENUM

CSA/FT6

<b>Conductor</b>	Annealed bare copper
<b>Insulation</b>	300V Colour Coded Foamed FEP Teflon
<b>Jacket</b>	Plenum rated Polyvinylchloride (SGPVC), Grey or Yellow
<b>Temperature</b>	75°C
<b>Shields</b>	100% aluminum/mylar tape shield with a stranded tinned copper drain wire
<b>Approvals</b>	UL listed as Type CL3Por CMP c(UL)us 75°C, FT6
<b>Applications</b>	For use in data communications and security applications.




Product Code	AWG Size	# of Pairs	Strd	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Nominal Cap. pF/ft	Cable Weight (lbs/mft)	Colour Code
42HC2401	24	1	7/32	0.016	0.015	0.144	12.5	13	Black/White

## MULTI-PAIR STRANDED FOIL SHIELD - PLENUM

CSA/FT6

<b>Conductor</b>	Stranded tinned copper
<b>Insulation</b>	300V PVC insulation
<b>Jacket</b>	Grey PVC
<b>Temperature</b>	60°C
<b>Shields</b>	Overall 100% aluminum/polyester shield with stranded tinned copper drain wire.
<b>Approvals</b>	UL listed CMP to harmonized standard C22.2 No.214 and UL 444 Passes CSA/FT6 flame and smoke test Passes UL 910 flame and smoke test
<b>Applications</b>	Low voltage applications, remote controls, computer system interface, communication and signal applications.

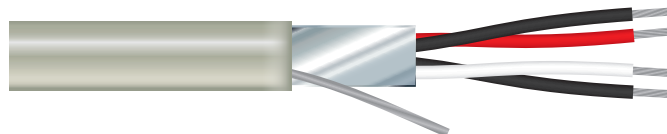

Product Code	AWG Size	# of Pairs	Strd	Drain Wire Size	Insulation Thickness (inches)	Jacket Thickness (inches)	Nom. O.D. (in.)	Nominal Cap (pF/ft)		Cable Wt (lbs/mft)	Colour Code
								A	B		
42GA2202U	22	2	7/30	24	0.008	0.015	0.193	35	68	20	3
42GA2203U	22	3	7/30	24	0.008	0.015	0.205	35	68	26	3

**A** – Conductor to conductor    **B** – 1 Conductor and other conductors connected to shield