


MULTI-CONDUCTOR STRANDED FOIL SHIELD - PLENUM

CSA/FT6

- Conductor** Stranded tinned copper
- Insulation** 300V Colour coded flame retardant PVC
- Jacket** Grey PVC
- Temperature** 60°C
- Shields** Overall 100% aluminum foil with stranded tinned copper drain wire.
- Approvals** UL listed CMP to harmonized standard C22.2 No.214 and UL 444
Passes CSA/FT6 flame and smoke test
Passes UL 910 flame and smoke test

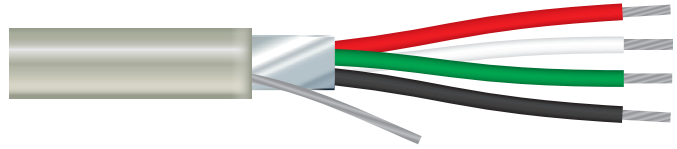

Applications Recording studios, broadcast sound systems and electronic circuits where RF shielding is required.

Product Code	AWG Size	# of Cond.	Strd	Drain Wire Size	Insulation Thickness (inches)	Jacket Thickness (inches)	Nom. O.D. (in.)	Nominal Cap (pF/ft)		Cable Wt (lbs/mft)	Colour Code
								A	B		
42EA2202U	22	2	7/30	24	0.008	0.015	0.133	45	87	12	1
42EA2203U	22	3	7/30	24	0.008	0.015	0.140	35	68	15	1
42EA2204	22	4	7/30	24	0.008	0.015	0.152	35	68	18	1
42EA2206U	22	6	7/30	24	0.008	0.015	0.180	35	68	24	1
42EA1802U	18	2	7/26	20	0.008	0.015	0.180	55	105	22	1
42EA1802U-10	18	2	7/26	20	0.008	0.015	0.180	55	105	22	white
42EA1802U-80	18	2	7/26	20	0.008	0.015	0.180	55	105	22	purple
42EA1803U	18	3	7/26	20	0.008	0.015	0.181	40	78	29	1
42EA1804U	18	4	7/26	20	0.008	0.015	0.198	40	78	36	1
42EA1805U	18	5	7/26	20	0.008	0.015	0.216	40	78	43	1
42EA1806U	18	6	7/26	20	0.008	0.015	0.237	40	78	51	1
42EA1808	18	8	7/26	20	0.008	0.015	0.257	40	78	65	1
42EA1602U	16	2	19/29	18	0.012	0.015	0.201	55	105	31	1