

DIRECT BURIAL MULTI-CONDUCTOR UNSHIELDED

- Conductor** Stranded tinned copper
- Insulation** Colour coded semi-rigid PVC
- Jacket** Black high density Polyethylene
- Temperature** -20°C to 80°C
- Applications** For direct earth burial low voltage applications on PA, signal, annunciator, speaker and sound systems.




Product Code	AWG Size	# of Cond.	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
35AE1802*	18	2	16/30	0.012	0.025	0.200	19	7

*Non-CSA

DIRECT BURIAL MULTI-CONDUCTOR FOIL SHIELD

- Conductor** Stranded tinned copper
- Insulation** Colour coded semi-rigid PVC
- Jacket** Black high density Polyethylene
- Shield** Overall aluminum/mylar shield and drain
- Applications** For direct earth burial low voltage applications on PA, signal, annunciator, speaker and sound systems.

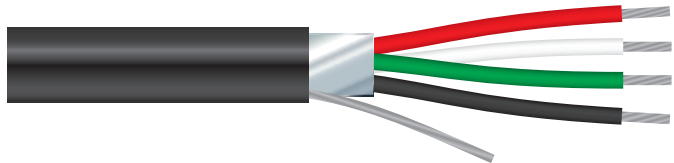

Product Code	AWG Size	# of Cond.	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
35AF1804*	18	4	16/30	0.012	0.025	0.236	120	1
35AF1806*	18	6	16/30	0.012	0.025	0.274	76.5	1

*Non-CSA