

DIRECT BURIAL MULTI-CONDUCTOR UNSHIELDED CSA


Conductor Stranded tinned copper
Insulation Colour-coded FR-XLPE
Jacket Black high density Polyethylene
Temperature -20°C to 80°C
Approvals CSA
Applications For direct earth burial low voltage applications on PA, signal, annunciator, speaker and sound systems.



Product Code	AWG Size	# of Cond.	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
35AE1802CSA	18	2	16/30	0.012	0.045	0.296	19	7

DIRECT BURIAL MULTI-CONDUCTOR FOIL SHIELD CSA

Conductor Stranded tinned copper
Insulation Colour coded semi-rigid PVC
Jacket Black high density Polyethylene
Shield Overall aluminum/mylar shield and drain
Approvals CSA
Applications For direct earth burial low voltage applications on PA, signal, annunciator, speaker and sound systems.

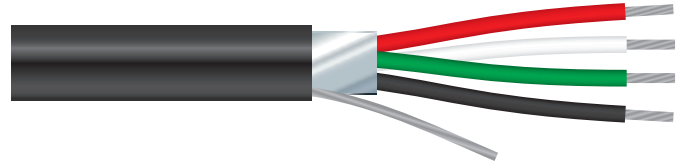

Product Code	AWG Size	# of Cond.	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
35AF1802CSA	18	2	16/30	0.012	0.045	0.295	75	1