


# MULTI-CONDUCTOR STRANDED FOIL SHIELD 105°C

CSA/FT4/UL

- Conductor** Stranded tinned copper
- Insulation** 600V Colour coded semi-rigid PVC
- Jacket** Grey PVC
- Temperature** -20°C to 105°C
- Shield** Overall 100% aluminum/polyester shield with stranded tinned copper drain wire
- Approvals** CSA Certified CMG/UL listed to CM harmonized standard C22.2 No. 214 and UL 444  
 Certified to CSA C22.2 No. 210.2 - Type AWM  
 Passes CSA/FT4 vertical flame test  
 Passes UL 70,000 BTU vertical flame test  
 75°C UL listed CMR (Riser) also available

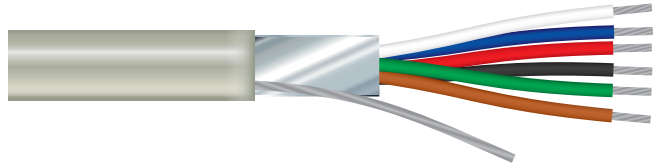

**Applications** For use in data transmission, recording studios, broadcast sound systems, electronic and control circuits and signal applications in computers and industrial equipment.

Product Code	AWG Size	# of Cond.	Stranding	Drain Wire AWG	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
35DA2202U	22	2	7/30	24	0.008	0.015	0.130	11	black/red
35DA2203U	22	3	7/30	24	0.008	0.015	0.138	14	7
35DA2203U-40	22	3	7/30	24	0.008	0.015	0.138	14	blue
35DA2204U	22	4	7/30	24	0.008	0.015	0.150	17	7
35DB2206U	22	6	7/30	24	0.008	0.023	0.194	26	1
35DB2208U	22	8	7/30	24	0.008	0.023	0.209	33	1
35DB2210	22	10	7/30	24	0.008	0.023	0.238	40	1
35DB2212	22	12	7/30	24	0.008	0.023	0.249	46	1
35DA2002U	20	2	7/28	24	0.009	0.015	0.150	14	black/red
35DA2002U-1	20	2	7/28	24	0.009	0.015	0.150	14	black/white
35DA2003U	20	3	7/28	24	0.009	0.015	0.159	19	7
35DA2004	20	4	7/28	24	0.009	0.023	0.190	27	7
35DB2006	20	6	7/28	24	0.009	0.023	0.224	37	1
35DA1802U	18	2	16/30	22	0.012	0.023	0.197	23	black/red
35DA1802U-1	18	2	16/30	22	0.012	0.023	0.197	23	black/white
35DA1802U-10	18	2	16/30	22	0.012	0.023	0.197	23	white
35DA1803U	18	3	16/30	22	0.012	0.023	0.209	30	7
35DA1804U	18	4	16/30	22	0.012	0.023	0.227	38	7
35DB1819	18	19	16/30	22	0.012	0.030	0.729	150	2
35DA1602U	16	2	26/30	20	0.015	0.023	0.235	34	black/red
35DA1602U-1	16	2	26/30	20	0.015	0.023	0.235	34	black/white
35DA1603U	16	3	26/30	20	0.015	0.023	0.25	45	7
35DA1604	16	4	26/30	20	0.015	0.023	0.273	57	7
35DA1402	14	2	41/30	18	0.020	0.023	0.283	50	black/red
35DA1404	14	4	41/30	18	0.020	0.030	0.345	90	7
35DA1202	12	2	65/30	16	0.030	0.030	0.391	127	1 or 7