


# MULTI-PAIR STRANDED FOIL SHIELD

## CSA/FT4/UL

- Conductor**    Stranded tinned copper
- Insulation**    600V Colour coded semi-rigid PVC
- Jacket**        Grey PVC
- Temperature**    -20°C to 105°C
- Shield**        Overall 100% aluminum/polyester with stranded tinned copper drain wire.
- Approvals**    CSA Certified CMG/UL listed to CM harmonized standard C22.2 No.214 and UL 444  
                      Certified to CSA standard C22.2 No. 210.2 – Type AWM  
                      Passes CSA/FT4 vertical flame test  
                      Passes UL 70,000 BTU vertical flame test
- Applications**    For use in data transmission, control circuits and signal applications in computers and industrial equipment.

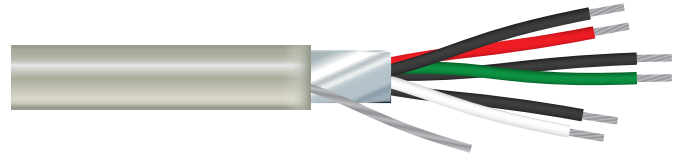

Product Code	AWG Size	# of Pairs	Strand-ing	Drain Wire Size	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Nominal Cap. (pF/ft)		Cable Weight (lbs/mft)	Colour Code
								A	B		
35F2202U	22	2	7/30	24	0.008	0.023	0.202	26	52	21	3
35F2204	22	4	7/30	24	0.008	0.023	0.236	26	52	34	3
35F2206	22	6	7/30	24	0.008	0.023	0.270	26	52	47	3
35F1802U	18	2	16/30	22	0.012	0.023	0.285	27	54	40	3
35F1803	18	3	16/30	22	0.012	0.030	0.318	27	54	58	3
35F1804	18	4	16/30	22	0.012	0.030	0.351	27	54	74	3
35F1806	18	6	16/30	22	0.012	0.030	0.402	27	54	103	3

**A** – Conductor to conductor    **B** – 1 Conductor and other conductors connected to shield