


MULTI-CONDUCTOR STRANDED - PLENUM

CSA/FT6

- Conductor** Stranded tinned copper
- Insulation** 300V Colour coded flame retardant PVC
- Jacket** Grey PVC
- Temperature** 60°C
- Approvals** UL listed CMP to harmonized standard C22.2 No.214 and UL 444
Passes CSA/FT6 flame and smoke test
Passes UL 910 flame and smoke test

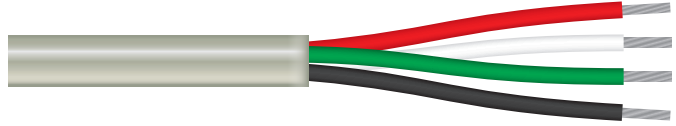

Applications PA systems, unbalanced intercom systems, interconnecting cables, remote control circuits, low voltage, broadcast and studio use, temperature control systems.

Product Code	AWG Size	# of Cond.	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
42AA2202U	22	2	7/30	0.008	0.015	0.124	9	1
42AA2204U	22	4	7/30	0.008	0.015	0.143	16	1
42AA2206U	22	6	7/30	0.008	0.015	0.171	22	1
42AA1802U	18	2	7/26	0.008	0.015	0.160	18	1
42AA1802U-1	18	2	7/26	0.008	0.015	0.160	18	black/red
42AA1802U-10	18	2	7/26	0.008	0.015	0.160	18	white
42AA1803U	18	3	7/26	0.008	0.015	0.171	25	1
42AA1804U	18	4	7/26	0.008	0.015	0.185	32	1
42AA1805U	18	5	7/26	0.008	0.015	0.206	39	1
42AA1806U	18	6	7/26	0.008	0.015	0.225	46	1
42AA1808U	18	8	7/26	0.008	0.015	0.245	61	1
42AA1810	18	10	7/26	0.008	0.015	0.291	75	1
42AA1602U	16	2	19/29	0.012	0.015	0.190	24	1
42AA1603U	16	3	19/29	0.012	0.015	0.210	33	1
42AA1604U	16	4	19/29	0.012	0.015	0.231	43	1
42AA1402U	14	2	19/27	0.015	0.015	0.227	38	1